

GLB-315-A-120/277

315W 120~277VAC

Ceramic Metal Halide Electronic Ballast

FEATURES

- Operates all 315W CMH lamps
- Soft Start stabilizes start-up loads and extends lamp life and performance
- LED status displays voltage and wattage in normal operation
- 6' 120VAC power cord provided
- 120/208/240/277VAC voltage sensing input
- Standard S-Type lamp connector
- Three year warranty

PROTECTIONS

- Short circuit
- Ignition failure
- Overheat
- Over/under voltage
- Open circuit
- End of Lamp Life (EOL)
- Hot-start

PERFORMANCE

Rated Voltage: 120-277VAC

Input Frequency: 50/60Hz

Ambient Operating Temperature (TA): -25°C~50°C

Crest Factor (CF): <1.5


Power Factor (PF): ≥0.95

Total Harmonic Distortion (THD): <20%

Current Draw: 2.84A @ 120VAC, 1.42A @ 240V, 1.23A @ 277VAC



AVAILABLE WHILE
SUPPLIES LAST

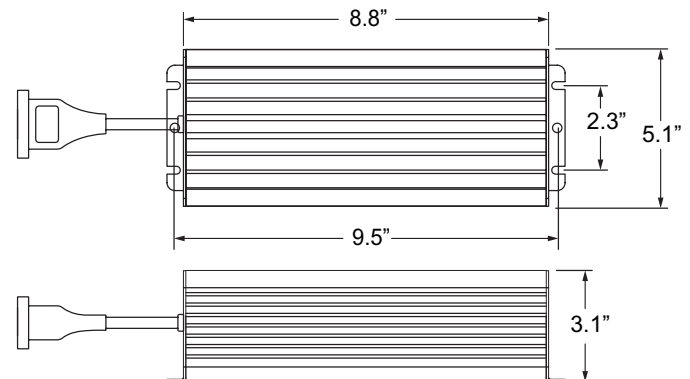

DIMENSIONS

Model	L"	W"	H"
GLB-315-A-120/277	8.8	5.1	3.1

WEIGHT

Model	Packaged Weight	Installed Weight
GLB-315-A-120/277	6.25 lbs (2.8kgs)	5.5 lbs (2.5kgs)

ORDERING INFORMATION

Example: GLB-315-A-120/277

Series/Configuration	Description
GLB-315-A-120/277	315W 120~277VAC Ceramic Metal Halide Electronic Ballast